


# For Earth, For Life



# kubota zero-turn mower Z122R

The ultimate residential zero turn mower combining style, comfort and performance.

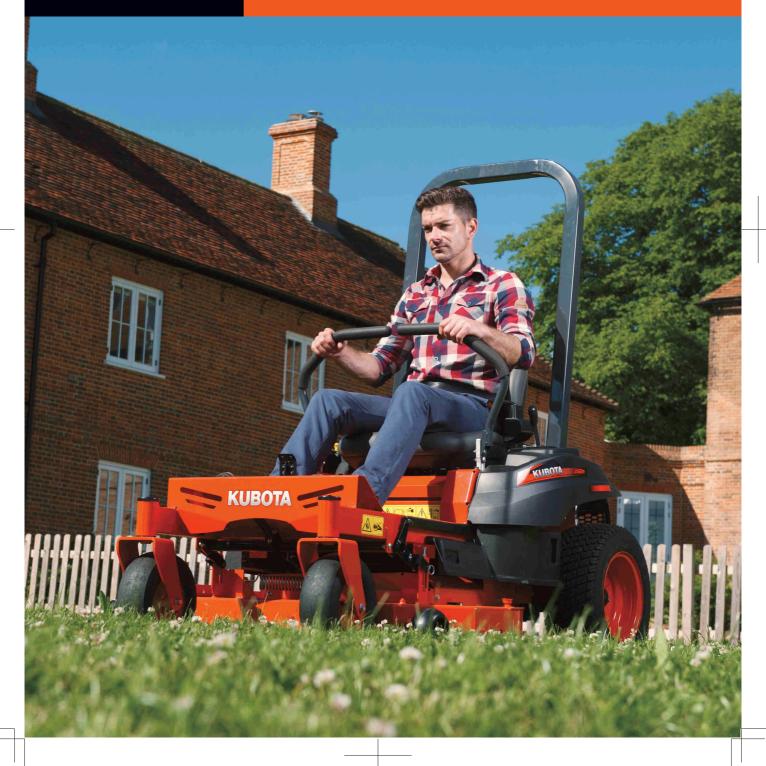

# Introducing the ALL-NEW Z122R with 42"deck.



The all new Z122R allows you to manoeuvre in and out of intricate spaces smoothly and with ease while delivering the power you need to get the job done quickly. With unmatched ergonomics and comfort, the Z122R allows you to keep working efficiently all day long.

Z122R Residential Zero-turn Mower



# **COMFORT, STYLE AND EASY OPERATION**

There's a lot to like about Z122R. From the comfortable ergonomic design to its style and convenience, this attractive, hardworking mower is designed to make mowing as easy as possible.

## STANDARD ROPS

For safety and peace of mind, Z122R mower is equipped with a full-height ROPS.

## SMOOTH OPERATION LEVERS

Dual operation levers provide the smooth, precise control you'll need for delicate trimming and work around trees and flowerbeds. For better comfort, the levers are also adjustable in height.

UBOTA

### **STORAGE BOXES**

For your tools, drink, and anything else too big or heavy for your pockets.

## 4" SLIDE SEAT

UBOT

The seat slides a full 4" forward and back, letting you find just the right position for maximum personal comfort.



## **COMFORT / CONVENIENCE / STYLE**

#### HIGH BACK SEAT

Soft and roomy, the high back seat will keep you comfortable even on those extra-long mowing jobs.



#### **WIDE FOOT PAN**

There's plenty of legroom up front, thanks to a wide foot pan. This also allows for easy access on and off the machine.



**ERGONOMIC CONTROL** 

All controls are neatly placed for

quick, easy, user-friendly access.

LAYOUT

#### **CUP HOLDER**

Keep your drink handy in the integrated cup holder.



## **EASY OPERATION**

#### 1/4" INCREMENT CUTTING HEIGHT ADJUSTMENT

A simple twist of a dial lets you adjust the cutting height in precise 1/4" increments.





## MAINTENANCE

#### **NO GREASE UP POINTS**

Removal of grease ports means simpler maintenance and increased user-friendliness.

#### EASY ENGINE MAINTENANCE

Easy access to engine oil and filter without having to remove a cover.

#### **WASH PORT**

Just connect your hosepipe to wash off wet grass.



## WHEN PERFORMANCE COUNTS...

The powerful engine, rugged transmission and strong frame of the Z122R, let you take on the toughest of jobs with confidence and ease.



## DEEP WELDED MOWER DECK

The fabricated mower deck provides outstanding professionallevel cutting. If you're a homeowner looking for the best finish, this mower deck is for you.



## 4.5-INCH DEEP MOWER DECK

The 107cm (42 inch) cutting width, 4.5 inch deep deck allows for efficient grass cutting. This results in a faster and better quality of cut.



あるとないない ちょうかん あいろうか とれたい たちのほう たい

**MULCHING MOWER** 

SIDE DISCHARGE MOWER

## **MULCHING KIT (OPTION)**

The mulching kit converts the standard deck into a high-precision mulching deck that produces an even finer mulch and sends it straight back into the turf.

## **Specifications**

Type     Petrol, air-cooled V-Twin       Inception     kW       Inception     cc       Total displacement     cc       Fuel tank capacity     /       Overall length     mm       Overall width wio discharge deflector     mm       Overall width wio discharge deflector     mm       Overall width wio discharge deflector     mm       Overall height     mm       Overall height     mm       Overall height     mm       Wheelbase     mm       Wheelbase     mm       Reverse     km/h       Reverse     km/h       Supplier and model     km/h       Supplier and model     Km/h       Travel speed     Supplier and model       Travel speed     km/h       Supplier and model     Hydro Gear EZT*(ZT-2200)       Travel speed     Km/h       Supplier and model     Criting width and angle adjustment       Supplier and model     minch       Travel speed     Cutting width angles       Supplier and model     minch
Horsepower (Net)     kW     14.1       Total displacement     cc     726       Fuel tank capacity     l     12.2       Dimension     Overall with w/o discharge dellector     mm     1890       Overall with w/o discharge dellector     mm     1075       Overall with w/o discharge dellector     mm     1075       Overall with w/o discharge dellector     mm     1235       Wieelbase     mm     1235       Wieelbase     mm     1235       Wieght     kg     282       Tyre     Front     11 x 4 - 5 Smooth       Rear     11 x 4 - 5 Smooth       Rear     18 x 7.5 - 10 Turf       Travel speed     km/h     0 - 10.5       Reverse     km/h     0 - 6.4       Supplier and model     Km/h     0 - 6.4       Supplier and model     Ymm     Bell Drive       Travel speed     Km/h     0 - 10.5       Supplier and model     Cot Log Lock / Hand Lever       Wower dect     Quiting witint     cm inch       Speed control     cm / inch
Total displacement     cc     726       Fuel tank capacity     /     12.2       Fuel tank capacity     /     12.2       Overall length     mm     1890       Overall width w/o discharge deflector     mm     1075       Overall height     mm     1075       Overall height     mm     1650       Verall beight     mm     1235       Verall beight     kg     282       Verall beight and model     kg     282       Travel speet     Forward     km/h     0       Reverse     km/h     0     0       Supplier and model     km/h     0     0       Yer     Stand levers with height and angle adjustment     107 /42       Speed control     cm / inch </td
Fuel tank capacity/12.2Dimensions Dimensions Overall width wird sicharge deflectmm1890Overall width wird sicharge deflectmm1890Overall width wird sicharge deflectmm1075Overall width wird sicharge deflectmm1075Overall width wird sicharge deflectmm1075Overall width wird sicharge deflectmm1075Overall width wird sicharge deflectmm1075Weightmm01035Weightkg282Traves per formForm8FrancesForwardkm/h0RearKm/h00Rearkm/h00OutputKm/h00RearKm/h00Signifier and modelKm/h0Traves per formSignifier and modelKm/hSignifier and modelKm/h0Traves per formSide (Mulching kit and angle adjustmentSide Constructioncm / inch107 / 42Nower dev for grade systemcm / inchSide (Mulching kit available as option)Outing width correntsmm / inch38 – 108 / 1.50 – 4.25Discharge for grade systemmm / inch6 / 0.25Deck pan thicknessGa./mmm / inchDeck pan thicknessGa./mMid mountDischargeKm / inch114 / 4.5Mower locationKm / inchMarker systemSide (Mulching kit available as option)Mower
Dimensions     Overall length     mm     1890       Overall width w/o discharge deflector     mm     1075       Overall height     mm     1075       Overall height     mm     1650       Wheelbase     mm     1235       Weight     kg     282       Tyre     Front     11 x 4 - 5 Smooth       Rear     11 x 4 - 5 Smooth       Rear     18 x 7.5 - 10 Turf       Travel speed     Fonward     km/h       Front     19 ye     -0 - 6.4       Transmission     Type
Overall width w/o discharge deflector mm     1075       Overall height     mm     1650       Wheelbase     mm     1235       Weight     kg     282       Tyre     Front     11 x 4 - 5 Smooth       Rear     11 x 4 - 5 Smooth       Tyres     Forward     km/h       Reverse     km/h     0-10.5       Reverse     km/h     0-6.4       Type     Independent T/M       Supplier and model     Km/h     0.0       Y/M drive system     Seped control     2 hand levers with height and angle adjustment       Parking brake system     Cog Lock / Hand Lever       Wower deck     Cutting width     cm / inch     107742       Discharge     mm / inch     38 – 108 / 1.50 – 4.25       Cutting height ranges     mm / inch     114/4.5       Deck pan depth     mm / inch     114/4.5       Deck pan depth     mm / inch     11/3.0       Deck pan depth     mm / inch     11/3.0
Overall heightmm1650Wheelbasemm1235Weightkg282Front282Front711 x 4 - 5 SmoothRear11 x 4 - 5 SmoothRear6 word0 - 10.5Reversekm/h0 - 0.6.4TransmissionTypeIndependent T/MSupplier and modelKm/hHydro Gear EZT*(ZT-2200)T/M drive system2 hand levers with height and angle adjustmentSupplier and modelCog Lock / Hand LeverParking brake system2 hand levers with height and angle adjustmentSupplier and modelcm / inch107 / 42Outling widthcm / inch38 - 108 / 1.50 - 4.25Cutting height rangesmm / inch6 / 0.25Deck pan depthmm / inch6 / 0.25Deck pan depthmm / inch114 / 4.5Deck constructionKm / mu / inch111 / 3.0Deck constructionGa / mu11 / 3.0Mower locationKm / inch11 / 3.0
Wheelbase     mm     1235       Weight     kg     282       Tyre     Front     282       Rear     11 x 4 - 5 Smooth       Rear     18 x 7.5 - 10 Turf       Reverse     km/h     0 - 10.5       Reverse     km/h     0 - 6.4       Supplier and model     Km/h     0 - 6.4       Supplier and model     Km/h     0 - 6.4       Supplier and model     Hydro Gear EZT*(ZT-2200)       TM drive system     Edit Drive       Speed control     2 hand levers with height and angle adjustment       Speed control     Con / inch     107 / 42       Vower dext     Cutting width     cm / inch     107 / 42       Discharge     mm / inch     38 - 108 / 1.50 - 4.25       Cutting height increments     mm / inch     6 / 0.25       Deck pan depth     mm / inch     6 / 0.25       Deck pan depth     mm / inch     114 / 4.5       Deck pan depth     mm / inch     114 / 4.5       Deck pan thickness     Ga / mm     111 / 3.0       Deck construction     Fabricated
Weightkg282FyreFrontRear11 x 4 - 5 SmoothTravel speedForwardkm/hReversekm/h0-10.5TransmissionTypeType10 d-6.4TransmissionTypeSupplier and modelT/M drive systemSpeed controlParking brake systemParking brake systemCutting widthcm / inchDischargemm / inchCutting height rangesmm / inchCutting height incrementsmm / inchPack pan depthmm / inchCutting height incrementsmm / inchCutting height incrementsmm / inchDeck pan depthmm / inchCuting height incrementsmm / inchMower locationGa. / mmMower locationGa. / mmMower locationSide (Mid mount
Front     11 x 4 - 5 Smooth       Rear     18 x 7.5 - 10 Turf       Travel speed     Forward     km/h       Reverse     km/h     0 - 10.5       Transmission     Type     0 - 6.4       Transmission     Supplier and model     V       Supplier and model     V     0 - 6.4       Transmission     Type     Supplier and model       T/M drive system     0 - 6.4       Speed control     Y     0 - 6.4       Parking brake system     0 - 6.4       Parking brake system     0 - 6.4       Parking brake system     0 - 6.4       Discharge     Cog Lock / Hand Lever       Cutting width     cm / inch     107 / 42       Discharge     mm / inch     38 - 108 / 1.50 - 4.25       Cutting height ranges     mm / inch     6 / 0.25       Deck pan depth     mm / inch     6 / 0.25       Deck pan thickness     Ga / mm     11 / 3.0       Deck construction     Mm / inch     11 / 3.0       Mower location     Mid mount     Mid mount
Rear   18 x 7.5 - 10 Turf     Travel speed   Forward   km/h   0 - 10.5     Reverse   km/h   0 - 6.4     Transmission   Type   Independent T/M     Yop   190   190     Yop   200   100
Fravel speed     Forward     km/h     0 - 10.5       Reverse     km/h     0 - 6.4       Transmission     Type     Independent T/M       Supplier and model     Y     Type       Ymmer     Mydro Gear EZT°(ZT-2200)       T/M drive system     2 hand levers with height and angle adjustment       Speed control     2 hand levers with height and angle adjustment       Parking brake system     COcg Lock / Hand Lever       Mower deck     Cutting width     cm / inch       Side (Mulching kit available as option)     107 / 42       Luting height ranges     mm / inch     6 / 0.25       Cutting height increments     mm / inch     6 / 0.25       Deck pan depth     mm / inch     11 / 3.0       Deck construction     Ga. / mm     11 / 3.0       Mower location     Ga. / mm     11 / 3.0
Reverse     km/h     0-6.4       Transmission     Type     Independent T/M       Supplier and model     Model     Hydro Gear EZT°(ZT-2200)       T/M drive system     Belt Drive     Belt Drive       Speed control     2 hand levers with height and angle adjustment       Nower deck     Cutting width     cm / inch     Cog Lock / Hand Lever       Independent from provide transport     Conscharge     mm / inch     107 / 42       Luting height ranges     mm / inch     Side (Mulching kit available as option)     mulch       Luting height increments     mm / inch     6 / 0.25     Mulch     Mulch       Deck pan depth     mm / inch     114 / 4.5     Fabricated     Mulch       Deck construction     Ga. / mm     Mulch mount     Mulch mount     Mulch mount
Transmission     Type     Independent T/M       Supplier and model     Hydro Gear EZT°(ZT-2200)       T/M drive system     Belt Drive       Speed control     2 hand levers with height and angle adjustment       Parking brake system     Cog Lock / Hand Lever       Mower deck     Cutting width     cm / inch       Discharge     mm / inch     107 / 42       Cutting height ranges     mm / inch     6 / 0.25       Cutting height increments     mm / inch     6 / 0.25       Deck pan depth     mm / inch     114 / 4.5       Deck construction     Mm / inch     11 / 3.0       Mower location     Mid mount     11 / 3.0
Supplier and model   Hydro Ger EZT*(ZT-2200)     T/M drive system   Belt Drive     Speed control   2 hand levers with height and angle adjustment     Parking brake system   Cog Lock / Hand Lever     Mower deck   Cutting width   cm / inch     Discharge   Side (Mulching kit available as option)     Cutting height ranges   mm / inch   38 – 108 / 1.50 – 4.25     Cutting height increments   mm / inch   6 / 0.25     Deck pan depth   mm / inch   111 / 3.0     Deck construction   Fabricated     Mower location   Mid mount
T/M drive system   Belt Drive     Speed control   2 hand levers with height and angle adjustment     Parking brake system   Cog Lock / Hand Lever     Mower deck   Cutting width   cm / inch     Discharge   Side (Mulching kit available as option)     Cutting height ranges   mm / inch   38 – 108 / 1.50 – 4.25     Cutting height increments   mm / inch   6 / 0.25     Deck pan depth   mm / inch   111 / 3.0     Deck construction   Fabricated     Mower location   Mid mount
Speed control     2 hand levers with height and angle adjustment       Parking brake system     Cog Lock / Hand Lever       Mower deck     Cutting width     cm / inch       Discharge     Side (Mulching kit available as option)       Cutting height ranges     mm / inch     38 – 108 / 1.50 – 4.25       Cutting height increments     mm / inch     6 / 0.25       Deck pan depth     mm / inch     111 / 4.5       Deck construction     Eabricated     Mower location
Parking brake system Cog Lock / Hand Lever   Mower deck Cutting width cm / inch 107 / 42   Discharge Side (Mulching kit available as option)   Cutting height ranges mm / inch 38 – 108 / 1.50 – 4.25   Cutting height increments mm / inch 6 / 0.25   Deck pan depth mm / inch 114 / 4.5   Deck construction Fabricated   Mower location Mid mount
Mower deck     Cutting width     cm / inch     107 / 42       Discharge     Side (Mulching kit available as option)       Cutting height ranges     mm / inch     38 – 108 / 1.50 – 4.25       Cutting height increments     mm / inch     6 / 0.25       Deck pan depth     mm / inch     114 / 4.5       Deck pan thickness     Ga. / mm     11 / 3.0       Deck construction     Fabricated       Mower location     Mid mount
DischargeSide (Mulching kit available as option)Cutting height rangesmm / inch38 - 108 / 1.50 - 4.25Cutting height incrementsmm / inch6 / 0.25Deck pan depthmm / inch114 / 4.5Deck pan thicknessGa. / mm11 / 3.0Deck constructionFabricatedMower locationMid mount
Cutting height increments mm / inch 6 / 0.25   Deck pan depth mm / inch 114 / 4.5   Deck pan thickness Ga. / mm 11 / 3.0   Deck construction Fabricated   Mower location Mid mount
Deck pan depthmm / inch114 / 4.5Deck pan thicknessGa. / mm11 / 3.0Deck constructionFabricatedMower locationMid mount
Deck pan thickness Ga. / mm 11 / 3.0   Deck construction Fabricated   Mower location Mid mount
Deck construction Fabricated   Mower location Mid mount
Mower location Mid mount
Mounting method Parallel linkages
induiting motion intragos
Adjustment of cutting height Dial adjustment system
Mower deck lifting method Mechanical Foot Lift Pedal
Driving method Belt Drive
Number of Blades 2
Washport 1
Fuel gauge Sight Window type
Seat 18inch Deluxe High Back Seat
ROPS Standard. ISO21299
PTO clutch Electric
Cup holder Standard
Hour meter Standard
Warranty 2 years / 300 hours

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purpose only. Some of the items pictured in this brochure are optional,

and not standard equipment. Please contact your local Kubota dealer for warranty, safety or product information.

## **Option kit**





• Arm rest kit

• Hitch kit







©2017 Kubota Corporation

# Kubota

#### KUBOTA (U.K.) LIMITED

Dormer Road Thame, Oxfordshire, OX9 3UN. Phone (01844) 268000

www.kubota.co.uk

